



FLOAT & DISPLACER TYPE LEVEL SWITCHES


2. MINI VERTICAL MOUNTING MAGNETIC FLOAT SWITCHES – MVFS

MVFS are installed vertically and can be side mounted through an elbow. They provide actuation at high, low or intermediate liquid levels. The switch actions can be reversed from N/O to N/C & vice versa by simply changing the float direction.

2.1 APPLICATIONS

Hot Water / Coffee Servers, Vending Machines, Ice Makers, Humidifiers, Food Industry, Air Conditioning & Refrigeration, Analysers, Engines, Agricultural Machines, Hydraulic, Lubricating & Oil Filtration Equipment's, Industrial Working Machines, Spark Erosion Machines & SPMs.

TYPICAL INSTALLATION INSIDE TANKS / LIQUID CONTAINERS

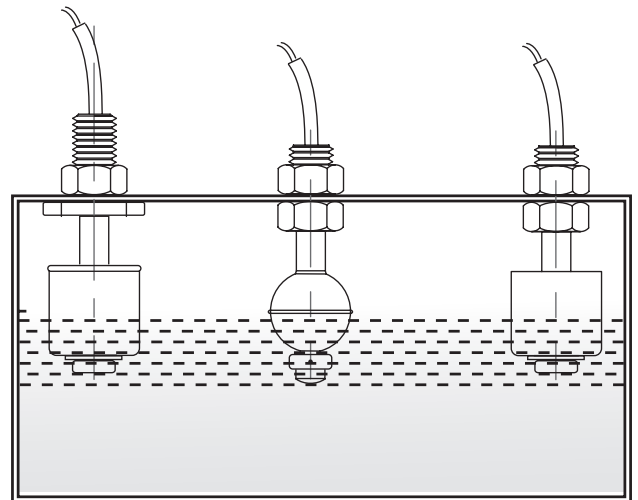

M-SS



M-SS
(BRASS VERSION)



M-SS
(CONNECTOR VERSION)



M-PU




M-PP

Type M-SS

Stem Material	304/316/316L.
Float Material	SS 316
Process Connection	M12 Thread with Lock Nut
Guide Stem	Ø 8 mm
Guide Stem Length	40 mm *
Float	Ø 28 mm
Specific Gravity	0.7
Design Pressure	2 Kg/cm ²
Design Temperature	Upto 70°C
Mounting Position	Vertical

Electrical Specifications

Switch Capacity	15 VA (NO)
Switching Voltage	125V AC / 200 V DC
Switching Current	0.25A
Switch Action	Reversible
Carry Current	0.5A
Termination	PVC X 1000mm extn. Lead wires

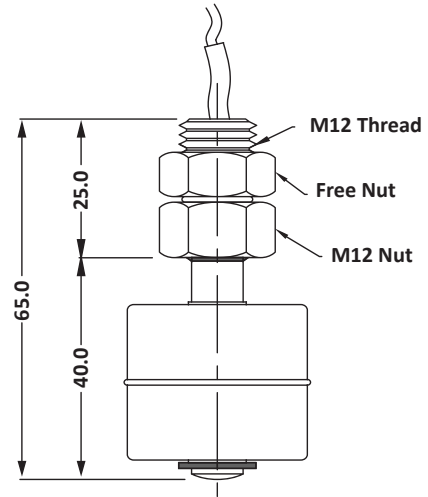


Type M-SS

Stem Material	304/316/316L.
Float Material	SS 316
Process Connection	M8 Thread with Lock Nut
Guide Stem	Ø 8 mm
Guide Stem Length	40 mm *
Float	Ø 28 mm
Specific Gravity	0.7
Design Pressure	2 Kg/cm ²
Design Temperature	Upto 70°C
Mounting Position	Vertical

Electrical Specifications

Switch Capacity	15 VA (NO)
Switching Voltage	125V AC / 200 V DC
Switching Current	0.25A
Switch Action	Reversible
Carry Current	0.5A
Termination	PVC X 1000mm extn. Lead wires

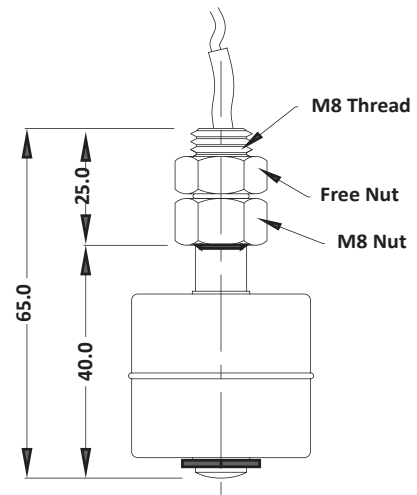


Type M-SS

Stem Material	304/316/316L.
Float Material	SS 316
Process Connection	M8 Thread with Lock Nut
Guide Stem	Ø 8 mm
Guide Stem Length	40 mm *
Float	Ø 28 mm
Specific Gravity	0.7
Design Pressure	2 Kg/cm ²
Design Temperature	Upto 70°C
Mounting Position	Vertical

Electrical Specifications

Switch Capacity	15 VA (NO)
Switching Voltage	125V AC / 200 V DC
Switching Current	0.25A
Switch Action	Reversible
Carry Current	0.5A
Termination	PVC X 1000mm extn. Lead wires

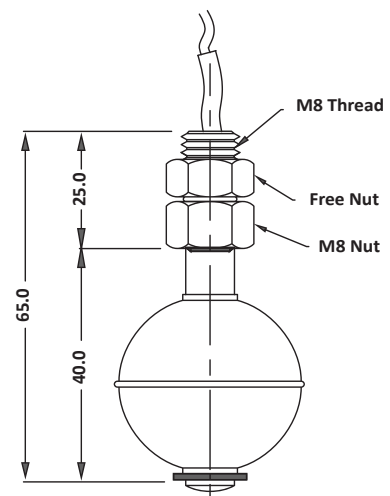

* Extension possible - Consult factory



Head office and Manufacturing - 1

SHRIDHAN Automation Pvt. Ltd.
#B-54, KSSIDC Industrial Estate,
Kumbalgodu, Mysore Road,
Bangalore-560074. India.
+91-80-28437847, +91 80 - 28437848
info@shridhan.com

Manufacturing - 2

SHRIDHAN Automation Pvt. Ltd.
#D-13 KIADB Industrial Area,
Kumbalgodu, Mysore Road,
Bangalore-560074. India.
+91-80-28437847, +91 80 - 28437848
info@shridhan.com

Middle East

ORBIT Automation FZE
#R4-40 A, PO Box - 122828,
SAIF Zone, Sharjah, UAE.

A 100% Subsidiary of
SHRIDHAN Automation Pvt. Ltd., India.
Ph:+97155 - 9347963,+97155 - 1883375
me@shridhan.com

